2862

PATENT

72WB 4-6-04

OCKET NO. RFSC-0004

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Clinton Hartmann

Serial No.:

10/062,791

Filed:

January 30, 2002

For:

"OBJECT-NAMING NETWORK INFRASTRUCTURE FOR

IDENTIFICATION TAGS AND METHOD OF OPERATION THEREOF

Group:

2862

Examiner:

N/A

Commissioner for Patents Washington, D. C. 20231

Il hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to a Commissioner for Patents: Washington, D.G. 20231; on 2 -/ (2-0 5) (Date)
Judy A Naon

Thesed or typed name of person signing the certificate)

Signal results by the person signing the certificate)

Sir:

LETTER TO OFFICIAL DRAFTSMAN

Transmitted herewith are thirteen sheets of formal drawings to be substituted for the informal drawings initially filed in the above-identified application for patent.

Respectfully submitted,

HITT GAINES & BOISBRUN, P.C.

limmy L. Heisz

Registration No. 38,914

Date: Fel 19, 2003

P.O. Box 832570 Richardson, Texas 75083 (972) 480-8800 RECEIVED
DEC 3 1 2003
GROUP 3600

, 3



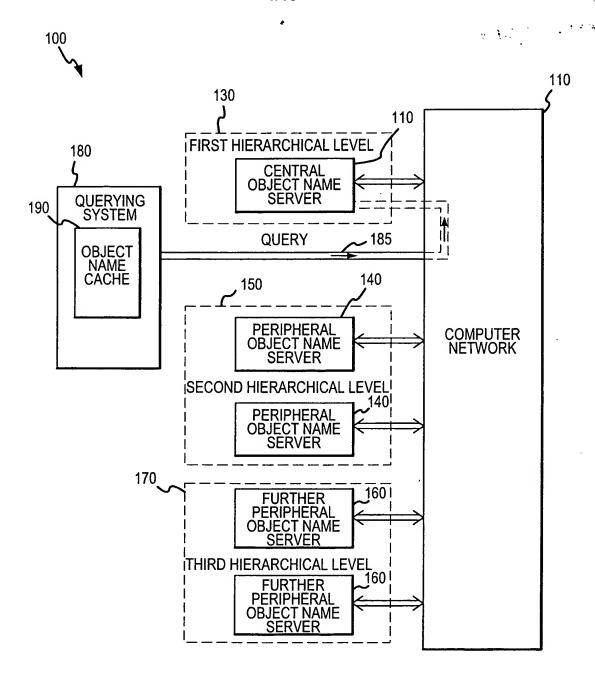


FIG.1



2/13


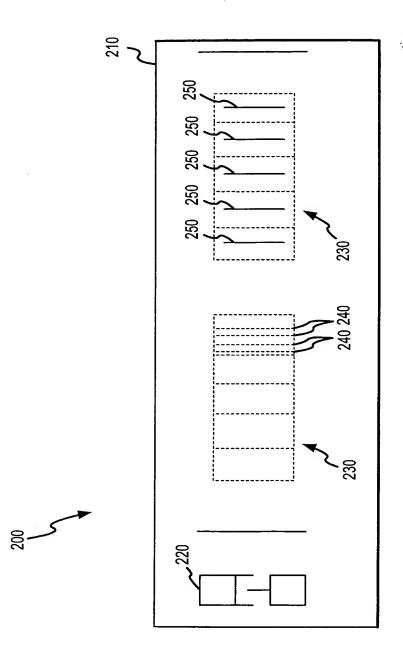



FIG.2






3/13

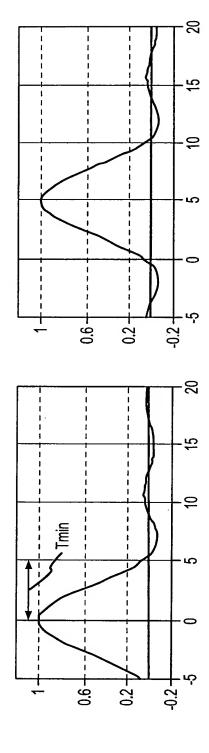

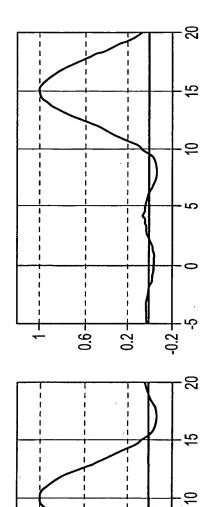


9.0



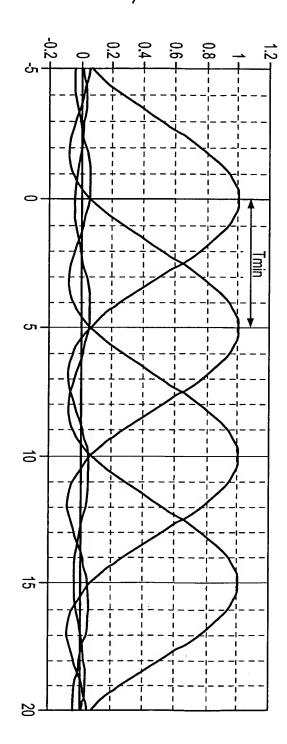

E1/4



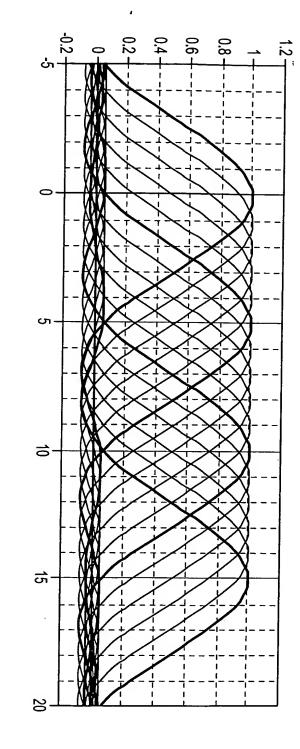


2/13








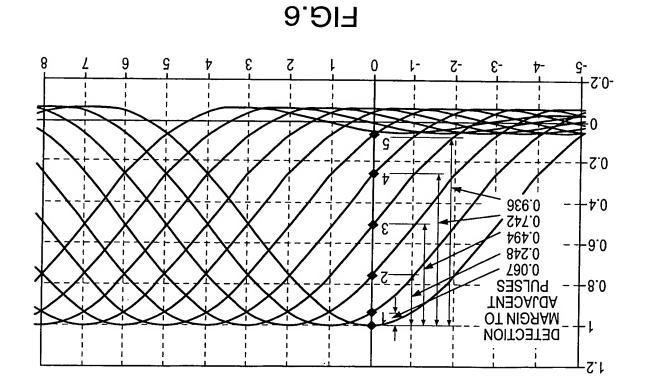

£1/9

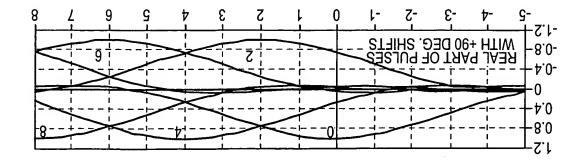

AT.DI7

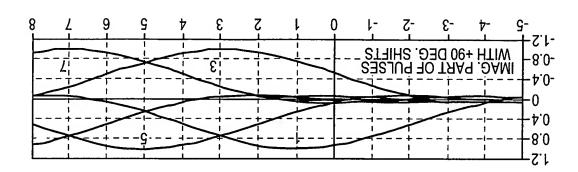


FIG.7B




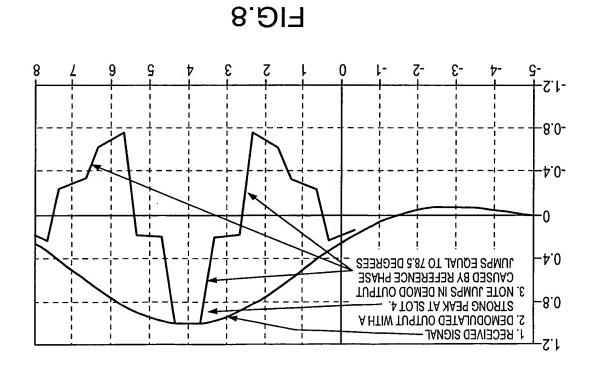




FIG.9

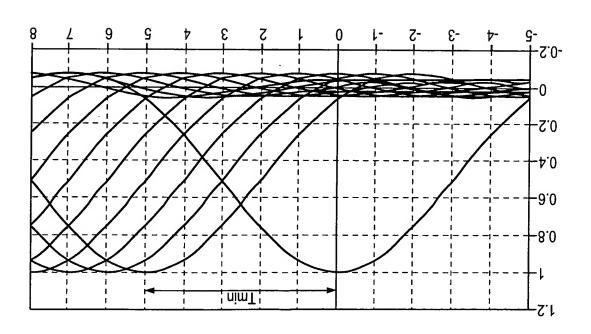

10/13

THREE REFLECTORS WITH MINIMUM SPACING OF 5 SLOTS HAVE 286 POSSIBLE PLACEMENTS IN 21 SLOTS EACH ROW SHOWS A UNIQUE PLACEMENT OF 2 ITEMS (X&Y) AND MULTIPLE PLACEMENT FOR THE 3RD (Z)

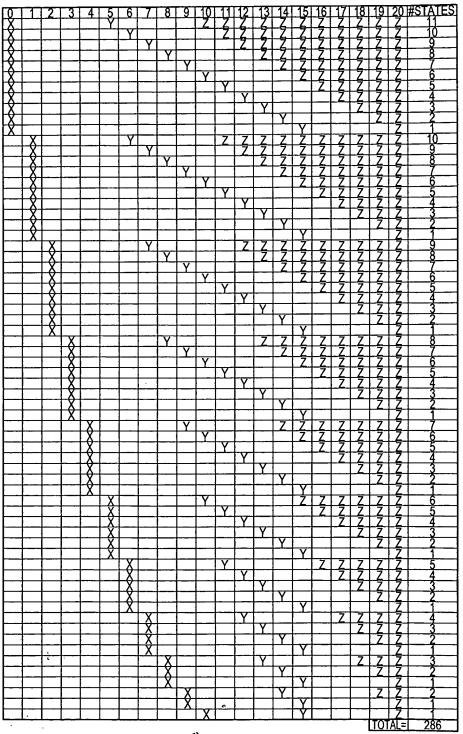


FIG.10







11/13

IN 10 SLOTS, TWO REFLECTORS WITH MINIMUM SPACING OF 2 SLOTS HAVE 36 POSSIBLE PLACEMENTS

| STATE | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|-----------------------|----------------------------|----------------------------|------------------|------------------|-------------|--------|---|---|---|---|
| 0 | | | Υ | | | | | | | |
| 1 | Х | | | Υ | | | | | | |
| 2 | Χ | | | | Υ | | | | | |
| 2 3 4 5 6 | X X X X X X | | | | | Υ | | | | |
| 4 | Χ | | | | | | Υ | | | |
| 5 | Х | | | | | | | Υ | | |
| 6 | Х | | | | | | | | Υ | |
| 7 | Х | | | | | | | | | Υ |
| 8 | | Х | | Y | | | | | | |
| 9 | | X | | | Υ | | | | | |
| 10 | | X X X X X X | | | | Υ | | | | |
| 11 | | Х | | | | | Υ | | | |
| 12 | | Χ | | | | | | Υ | | |
| 13 | | Х | | | | | | | Υ | |
| 14 | | Х | | | | | | | | Υ |
| 15 | | | Х | | Υ | | | | | |
| 16 | | | X X X X | | | Υ | | | | |
| 17 | | | Х | | | | Υ | | | |
| 18 19 | | | X. | | | | | Υ | | |
| 19 | | | X | | | | | | Υ | |
| 20 21 22 | | | Х | | | | | | | Υ |
| 21 | | | | Х | | Υ | | | | |
| 22 | | | | X | | | Υ | | | |
| 23 24 | | | | X X X X | | | | Υ | | |
| 24 | | | | X | | | | | Υ | |
| 25 | | | | Х | | | | | | Υ |
| 26 | | | | | Х | | Υ | | | |
| 27 | | | | | X X X | | | Υ | | |
| 28 | | | | | Х | | | | Υ | |
| 29 | | | | | Х | | | | | Υ |
| 30 | | | | | | Χ | | Υ | | |
| 31 | | | | | | X X | | | Υ | |
| 32 | | | | | | Х | | | | Υ |
| 33 | | | | | | | Χ | | Y | |
| 34 | | _ | | | | | X | | | Υ |
| 35 | | | | | | | | Х | | Υ |

FIG.11



12/13

IN 10 SLOTS, TWO REFLECTORS WITH MINIMUM SPACING OF 3 SLOTS AND ALLOWING ONLY ONE EVEN NUMBERED AND ONE NUMBERED SLOT PROVIDES 16 POSSIBLE STATES

| STATE | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|-------|---|---|---|---|---|---|----------|---|----|---|
| 0 | Х | | | Υ | | | | | | |
| 1 | Χ | | | | | Υ | | | | |
| 2 | Х | | | | | | | Υ | | |
| 3 | Χ | | | | | | | | | Υ |
| 4 | | X | | | Υ | | <u> </u> | | | |
| .5 | | X | | | | | Υ | | | |
| 6 | | Х | | | | | | | Υ | |
| 7 | | | X | | | Υ | | | | |
| 8 | | | Χ | | | | | Υ | | |
| 9 | | | Χ | | | | | | | Υ |
| 10 | | | | Χ | | | Υ | | | |
| 11 | | | | Χ | | | | | Υ- | |
| 12 | | | | | Х | | | Υ | | |
| 13 | | | | | X | | | | | Υ |
| 14 | | | | | | Х | | | Υ | |
| 15 | | | | | | | Χ | | | Υ |

FIG.12



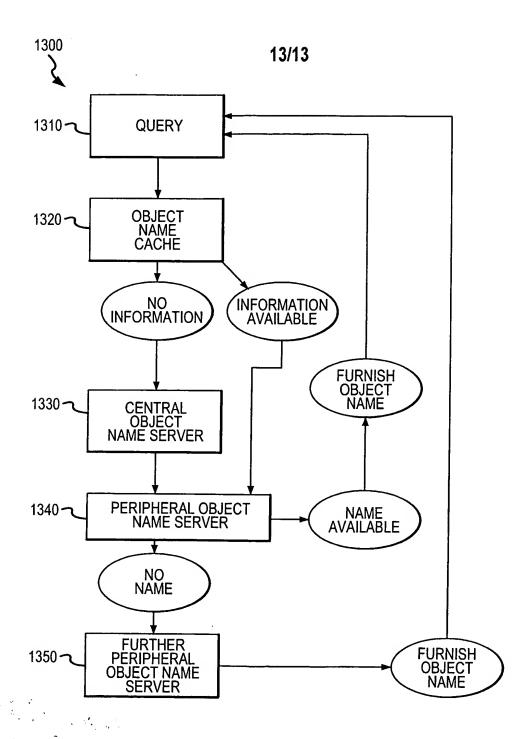


FIG.13

